
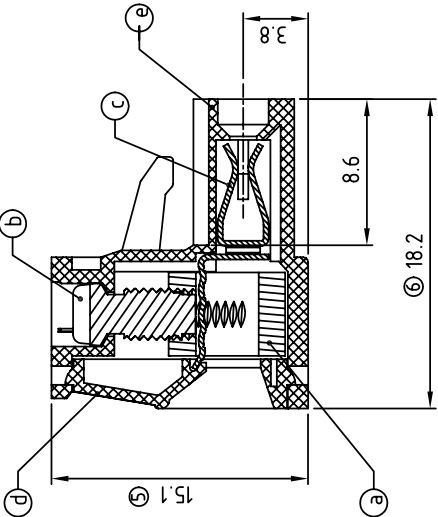
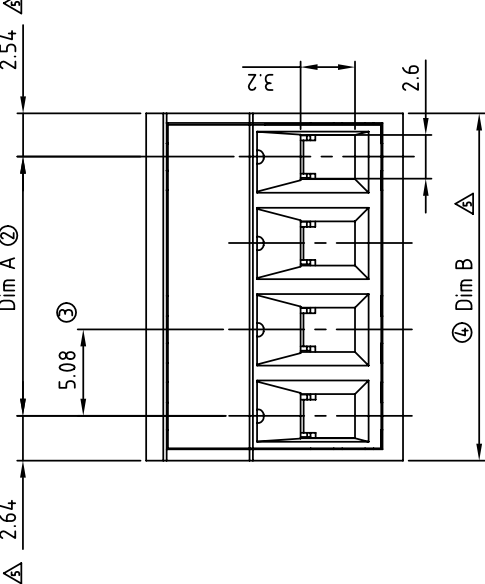
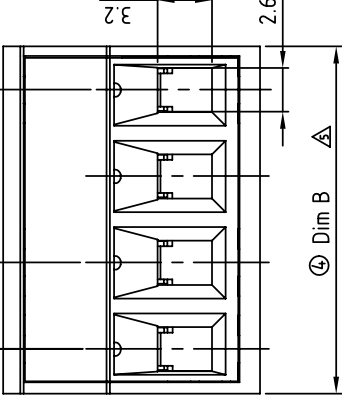


1	2	3	4	5	6	7
SIGN		DATE		DESCRIPTION		
△		01/25/05		Part No. changed		
△		06/26/06		Current rating(cULus) is changed from 10A to 20A		
△		06/26/06		Solid/Stranded wire(AWG) is changed from 12-22 to 12-24		
△		8/10/06		Added VDE and TUV standard		
△		7/21/08		Body is changed.		
△		2010.03.08		Add the 2P mark		
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!!						
Material						
● Item ㉓ Clamp: Brass(CuZn) Ni plated						
● Item ㉔ Terminal screw: Steel Zinc plating "-"- slot type						
● Item ㉕ Female contact: PhBz ,Tin plated						
● Item ㉖ Terminal Cover: Thermoplastic (UL94V-0)						
● Item ㉗ Terminal housing: Thermoplastic (UL94V-0)						
△ Electrical cULus/VDE/TUV						
● Voltage rating: 300VAC/300VAC/300VAC						
△ ● Current rating: 20A/20A/20A						
● Wire range: 2.5mm ² /0.34-2.5mm ²						
△ ● Solid wire(AWG): 12-24/14-22						
△ ● Stranded wire(AWG): 12-24/14-22						
● Torque: 5Lb-In/0.5Nm/0.56Nm						
● Screw: M3						
● Wire strip length: 7-8mm						
● Withstanding Voltage: 1.6KV/2.5KV/2.5KV						
● Operating temperature: -40°C to +115°C						
● Safety Approval:   						
● Use with 0010x1.0mm square pin, Withdrawal force:200 – 500gf /pole						
TJ XX 51 X 3 XXXX G △						
02 2 CONTACTS 0 Black (RAL9005) 000 0 Standard @ Logo Pb < 4,0,000ppm						
03 3 CONTACTS 2 Red (RAL3001/D) 000 A Standard ANY Logo(RoHS)						
... .. 3 Orange(RAL2011/P) Any special item by						
24 24 CONTACTS 4 Yellow(RAL1018/A) please contact sales,						
5 Green(RAL6018/T) department.						
6 Blue (RAL5015/A)						
8 Grey(RAL7035/D)						
						
						
						
						
DIMENSION						
L N×5.08						
A (N-1)×5.08						
B N×5.08+0.1						
N=Number of poles						
Poles Tolerance						
DIM A ±0.15						
DIM B ±0.20						
2p-6p ±0.20						
7p-12p ±0.25						
13p-18p ±0.30						
19p-24p ±0.40						
CUSTOMER COPY						
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR, PROPERTY OF ANYTEK TECHNOLOGY CO., LTD						
TITLE TJ-5.08mm Series						
PART NO. TJxx51x3xxxxG						
DWG NO. 8TJ0007						
CUST NO.						
DESIGNED Jacke						
CHECKED Jacke						
DRAWN Jacke						
2010.03.09						
2010.03.09						
SHEET: 01/01						
REV.: G						
Tolerance						
X. ±0.50						
X.X ±0.30						
X.XX ±0.10						
X° ±1°						